pac-mac

PATENT PENDING

Sourcewell
Awarded Contract
Contract # 010825-HMC

npp gov

ROLL-OFF HOIST

The Pac-Mac Roll-Off offers superior versatility, maneuverability, and value. Pac-Mac sets the standard for the superior performance-driven fleets in the waste industry.
DO IT RIGHT with Pac-Mac!

MADE IN THE USA

Visit us online at www.e-pac-mac.com

Manufactured by Hol-Mac Corporation • P.O. Box 349 • Bay Springs, MS 39422 • 601-764-4121

pac-mac

ROLL-OFF HOIST

TECHNICAL DATA & SPECIFICATIONS

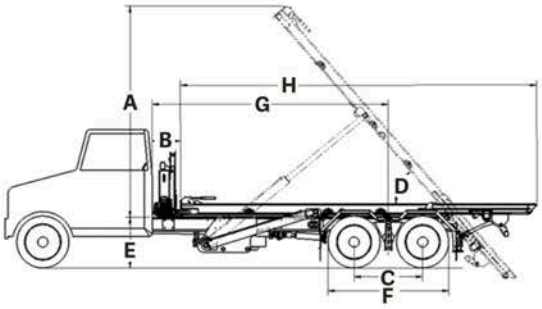

MODEL	A	B	C	D	E	F	G	H
PMRO_601740R	167"	22"	51-55"	49°	43" MAX	96" MAX	186"	281"

Minimum Chassis Requirements (Tandem Anxle)

*The chart below is an example of how to calculate the chassis section modulus (RBM/PSI+SM). Regardless of the frame YIELD and RBM, the minimum. SM must be 17.5 in3 or more per each frame rail.

Frame Channel Height	RBM	Yield (PSI)	RBM/PSI=SM in3
10 in. or more (Single wall)	2,400,000 - 4,000,000	120,000 psi	20 in3 - 33.3 in3
10 in. or more (Double wall)	2,000,000 - 4,000,000	100,000 psi	20 in3 - 40 in3

Note: The single-walled 12k psi with RBM less than 2,400,000 would not be acceptable because its SM would fall below the 20 in3 minimum specifications (2,300,000/120,000=19.17 in3).
For frames less than 10 in., consult engineering.

*Patent Pending bolt-on intergrated hydraulic valve, tank, and tarper base.

*Patent Pending ergonomic control console that includes: rear camera monitor, hoist controls, work light switch, PTO switch, and optional on-board scale digital read-out and printer

Mechanical forward folding ICC Bumper (Can be pinned up for trailering)

*Patent Pending hydraulic fluid line for tarper system

STANDARD FEATURES: * Patent Pending

Controls
- Spin-on filter, spin-on breather, and sight glass with temperature gauge
- Sectional manual control valve outside of cab
- Hoist controls inside the cab on a swing-away control tower*

Hoist
- 60,000 lbs. or 75,000 lbs. capacity
- For outside rail containers up to 22 ft. long x 8 ft. tall
- Hol-Mac reverse-mounted 6 in. lift cylinders. 7 in. reeving cylinders - Made in the USA
- Sleeved hoses to protect the hoses
- Rigid rear container hold downs
- Sliding rear strap winch hold downs
- Steel line plumbing reduces rubber hoses to a minimum*
- 10 in. cable sheaves with 2 1/2 in. pins
- 4 in. diameter double-shear heavy-duty side rollers with replaceable pins
- Auto forward-folding mechanical ICC bumper. Stowable for trailering.
- Pintle-ready hitch rear attachment point
- Heavy-duty cable end storage
- Bolt on replaceable steel fenders and tarper system
- 8 in. wide x 3/4 in. thick rear glide pads
- 49° tilt angle
- All lube fittings are accessible from ground level
- Wiring runs through a full-length steel conduit

Hydraulics
- Hydraulic tank located back of cab for improved cooling, improved supply to pump, and stays cleaner
- Hydraulic pressure gauge

Warranty
- 3-year major structural component parts
- 1-year non-hydraulic replacement parts

Safety
- ANSI Z-245 compliance
- Automatic roller lock
- Dual safety props for maintenance
- Dual tone backup alarm and hoist-up alarm with a signal light in cab
- D.O.T. approved recessed L.E.D. lighting and reflectors
- Mid-body L.E.D. turn signals
- High-mounted license plate bracket
- Mud flaps front and rear
- Rear camera guard

OPTIONS:

- Integrated arm-type tarper
- Fold-down auxiliary front stops for short containers
- Two work lights mounted on rear light boxes
- Steel toolbox 18 in. x 18 in. x 48 in. left, right, or both
- Bolt on onboard scale kit. No modifications required
- Rear camera
- On-board scale system printer

POWERED BY:
HOL-MAC CORPORATION

Manufactured by Hol-Mac Corporation
P.O. Box 349 • Bay Springs, MS 39422 • 601-764-4121
Visit us online at www.hol-mac.com

All designs, specifications, and components are subject to change at the manufacturer's sole discretion at any time without notice. Data published herein is for informational purposes only and shall not be construed to warrant suitability of the unit for any particular purpose, as performance may vary with the conditions encountered. The only warranty is our standard written warranty for this product at the time of shipment.

3.0_06012026